


# Dot Graphic VFD Module

# CU200211-KTW260A

- 2 Lines of 20 Characters 11mm High
- High Speed Parallel/TTL Serial Interface
- Operating Temp -40°C to +85°C
- Single 5V Supply
- High Brightness Blue Green Display
- ASCII, Katakana & Extended Character Font
- 16 User Definable Character RAM

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 19,200 with or without parity. Two character font tables can be hardware or software selected. User defined characters and many control commands are available.

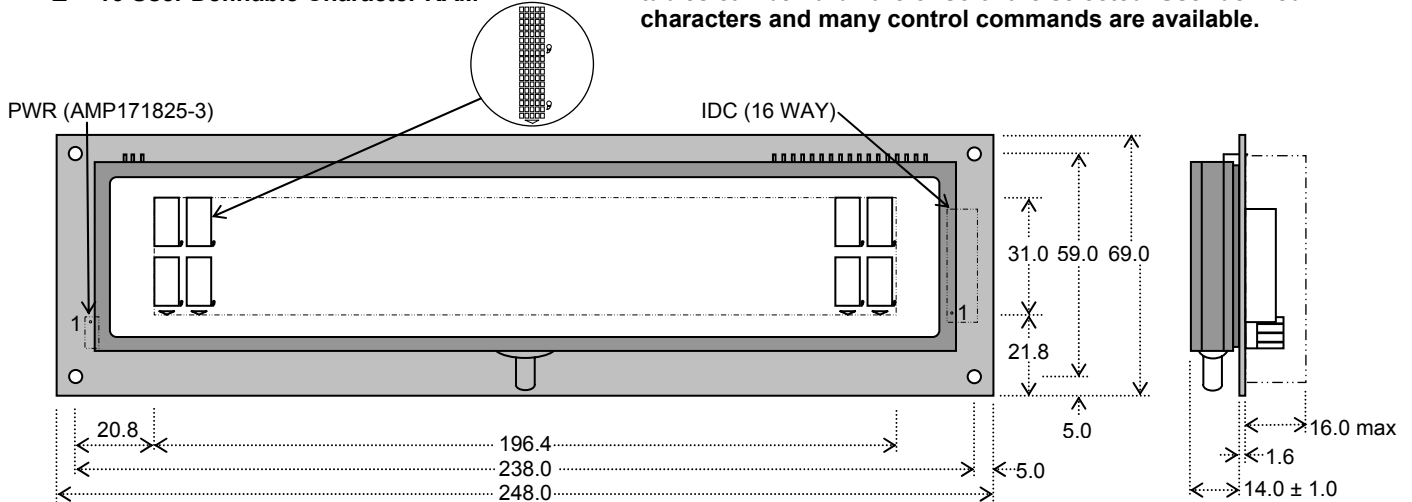

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V <sub>CC</sub>	5.0VDC +/- 5%	GND=0V
Power Supply Current	I <sub>CC</sub>	1100mADC typ.	V <sub>CC</sub> =5V
Logic High Input	V <sub>IH</sub>	2.0VDC min.	V <sub>CC</sub> =5V
Logic Low Input	V <sub>IL</sub>	0.8VDC max.	V <sub>CC</sub> =5V
Logic High Output	V <sub>OH</sub>	2.4VDC min.	I <sub>OH</sub> = -2.0mA
Logic Low Output	V <sub>OL</sub>	0.5VDC max.	I <sub>OL</sub> = 2.0mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I<sub>CC</sub>.

### OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	6.5 x 11.3/9.9 x 14.85
Dot Size/Pitch (XxY mm)	1.1 x 1.4/1.35 x 1.65
Luminance	350 cd/m <sup>2</sup> min.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

### CHARACTER FONTS

	International Font										Additional Katakana Font														
	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0	80	90	A0	B0	C0	D0	E0	F0	
00																									
01																									
02																									
03																									
04																									
05																									
06																									
07																									
08																									
09																									
0A																									
0B																									
0C																									
0D																									
0E																									
0F																									

### SOFTWARE COMMANDS

Instruction	D0-D7	Instruction	D0-D7
Back Space	08H	Escape	1BH
Horizontal Tab	09H	> Send User Font	+43H
Line Feed	0AH	> Position cursor	+48H
Form Feed	0CH	> Software Reset	+49H
Carriage Return	0DH	> Luminance	+4CH
Clear Display	0EH	> Flickerless Write	+53H
Increment Write Mode	11H	> Cursor Blink Speed	+54H
Vertical Scroll Mode	12H	Character Data	20H-FFH
5x7 Block Cursor On	15H	User Character Data	00H-FFH
Cursor Off	16H	Post Decimal Point	1C
International Font	18H	Post Comma	1D
Katakana Font	19H	Post Semi Colon	1E
Euro Currency Mark	1AH		

### TIMING PARAMETERS (min)

Data Set Up To Write	100ns	Subject to change without notice.
Write Pulse Width	160ns	Detailed specification on request.
Hold After Write	10ns	IUK Doc Ref:5044 Iss:3 7Mar05

### IDC DATA CONNECTOR

Pin	Sig	Pin	Sig
1	D7	9	/WR
2	D6	10	/CS
3	D5	11	S <sub>IN</sub> /TEST
4	D4	12	BUSY
5	D3	13	G <sub>ND</sub> (0V)
6	D2	14	G <sub>ND</sub> (0V)
7	D1	15	V <sub>CC</sub> (5V)
8	D0	16	V <sub>CC</sub> (5V)

### 3 PIN POWER CONNECTOR

Pin	Sig
1	V <sub>CC</sub> (5V)
2	S <sub>IN</sub> /TEST
3	G <sub>ND</sub> (0V)

Mates with AMP171822-3

Defaults: 19200, Even parity, International Font.

### PCB JUMPERS (OPEN/L/JINK)

Baud	J2	J1	J0
19200	O	O	O
9600	O	O	L
4800	O	L	O
2400	O	L	L
1200	L	O	O
Parity	J4	J3	
EVEN	O	O	
ODD	O	L	
NONE	L	L/O	
Font	JA		
International	O		
Katakana	L		

Noritake Sales Office Tel Nos  
 Nagoya Japan: +81 (0)52-561-9867  
 Canada: +1-416-291-2946  
 Chicago USA: +1-847-439-9020  
 Munchen (D): +49 (0)89-3214-290  
 Itron UK: +44 (0)1493 601144  
 Rest Europe: +49 (0)61-0520-9220  
[www.noritake-iron.com](http://www.noritake-iron.com)

## SOFTWARE COMMANDS

Instruction +busy time	Data Format	Description																																																																																									
Backspace 6us	08H	Moves the cursor left by one character. If the cursor is at the left end of the bottom line the cursor moves to the right end of the top line. If the cursor is at the left end of the top line no cursor movement is made.																																																																																									
Horizontal Tab 6us (20us on scroll)	09H	Moves the cursor right by one character. If the cursor is at the right end of the top line the cursor moves to the left end of the bottom line. If the cursor is at the right end of the bottom line the action depends on the write mode currently selected. In DC1 mode the cursor moves to the left end of the top line. In DC2 mode the entire display contents is scrolled up by one line, the bottom line is cleared and the cursor moves to the left end of the bottom line.																																																																																									
Line Feed 6us (20us on scroll)	0AH	Moves the cursor down by one line. If the cursor is on the bottom line the action depends on the write mode currently selected. In DC1 mode the cursor moves to the top line. In DC2 mode the entire contents of the display is scrolled up by one line and no cursor movement is made.																																																																																									
Form Feed 6us	0CH	Moves the cursor to the top left end of the display.																																																																																									
Carriage Return 6us	0DH	Moves the cursor to the left end of the current line.																																																																																									
Clear 40us	0EH	Clear all displayed characters. No cursor movement is made.																																																																																									
Overwrite mode (DC1) 6us	11H	Specifies character overwrite mode. (default)																																																																																									
Vertical scroll mode (DC2) 6us	12H	Specifies vertical scroll mode.																																																																																									
Cursor on (DC5) 6us	15H	A blinking full block is displayed at the cursor position. The blink rate can be specified using the Blink Speed Control command.																																																																																									
Cursor off (DC6) 6us	16H	No cursor is displayed.																																																																																									
International Font 6us	18H	All subsequent characters displayed will be from the International font. This font can also be selected as the default by using the JA hardware jumper link (OPEN).																																																																																									
KATAKANA Font 6us	19H	All subsequent character displayed will be from the KATAKANA font. This font can also be selected as the default by using the JA hardware jumper link (LINKED).																																																																																									
Euro Symbol 7us (20us on scroll)	1AH	Displays the Euro symbol at the current cursor position.																																																																																									
User Defined Font 6us (1BH) 4us (43H) 6us (byte 1) 6us (byte 2) 6us (byte 3) 6us (byte 4) 15us (byte 5)	1BH + 43H + character code + data byte 1 + data byte 2 + data byte 3 + data byte 4 + data byte 5	<p>Define a user character. Up to 16 user characters can be defined and stored by the module. The specified character code can be 00H – FFH. Command codes can be overwritten with a UDF so be aware that doing so will disable that command. All UDF's are lost on power off or reset. If more that 16 UDF's are defined the older definitions are overwritten.</p> <p style="text-align: center;">Bit / Byte assignment</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td>7</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>1</td> <td>0</td> </tr> <tr> <td>Byte 1</td> <td>P8</td> <td>P7</td> <td>P6</td> <td>P5</td> <td>P4</td> <td>P3</td> <td>P2</td> <td>P1</td> </tr> <tr> <td>Byte 2</td> <td>P16</td> <td>P15</td> <td>P14</td> <td>P13</td> <td>P12</td> <td>P11</td> <td>P10</td> <td>P9</td> </tr> <tr> <td>Byte 3</td> <td>P24</td> <td>P23</td> <td>P22</td> <td>P21</td> <td>P20</td> <td>P19</td> <td>P18</td> <td>P17</td> </tr> <tr> <td>Byte 4</td> <td>P32</td> <td>P31</td> <td>P30</td> <td>P29</td> <td>P28</td> <td>P27</td> <td>P26</td> <td>P25</td> </tr> <tr> <td>Byte 5</td> <td>-</td> <td>-</td> <td>-</td> <td>COM</td> <td>DP</td> <td>P35</td> <td>P34</td> <td>P33</td> </tr> </table> <p style="text-align: right;">Dot assignment</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>P1</td> <td>P2</td> <td>P3</td> <td>P4</td> <td>P5</td> </tr> <tr> <td>P6</td> <td>P7</td> <td>P8</td> <td>P9</td> <td>P10</td> </tr> <tr> <td>P11</td> <td>P12</td> <td>P13</td> <td>P14</td> <td>P15</td> </tr> <tr> <td>P16</td> <td>P17</td> <td>P18</td> <td>P19</td> <td>P20</td> </tr> <tr> <td>P21</td> <td>P22</td> <td>P23</td> <td>P24</td> <td>P25</td> </tr> <tr> <td>P26</td> <td>P27</td> <td>P28</td> <td>P29</td> <td>P30</td> </tr> <tr> <td>P31</td> <td>P32</td> <td>P33</td> <td>P34</td> <td>P35</td> </tr> </table> <p style="text-align: right;">COM </p>		7	6	5	4	3	2	1	0	Byte 1	P8	P7	P6	P5	P4	P3	P2	P1	Byte 2	P16	P15	P14	P13	P12	P11	P10	P9	Byte 3	P24	P23	P22	P21	P20	P19	P18	P17	Byte 4	P32	P31	P30	P29	P28	P27	P26	P25	Byte 5	-	-	-	COM	DP	P35	P34	P33	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25	P26	P27	P28	P29	P30	P31	P32	P33	P34	P35
	7	6	5	4	3	2	1	0																																																																																			
Byte 1	P8	P7	P6	P5	P4	P3	P2	P1																																																																																			
Byte 2	P16	P15	P14	P13	P12	P11	P10	P9																																																																																			
Byte 3	P24	P23	P22	P21	P20	P19	P18	P17																																																																																			
Byte 4	P32	P31	P30	P29	P28	P27	P26	P25																																																																																			
Byte 5	-	-	-	COM	DP	P35	P34	P33																																																																																			
P1	P2	P3	P4	P5																																																																																							
P6	P7	P8	P9	P10																																																																																							
P11	P12	P13	P14	P15																																																																																							
P16	P17	P18	P19	P20																																																																																							
P21	P22	P23	P24	P25																																																																																							
P26	P27	P28	P29	P30																																																																																							
P31	P32	P33	P34	P35																																																																																							
Cursor Moving 6us (1BH) 4us (48H) 4us (position)	1BH + 48H + position	<p>The cursor is moved to the specified position. The relationship between the position value and the display is as follows:-</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td>Left end</td> <td>2<sup>nd</sup> col</td> <td>3<sup>rd</sup> col</td> <td>-</td> <td>Right end</td> </tr> <tr> <td>Top</td> <td>00H</td> <td>01H</td> <td>02H</td> <td>-</td> <td>13H</td> </tr> <tr> <td>Bottom</td> <td>14H</td> <td>15H</td> <td>16H</td> <td>-</td> <td>27H</td> </tr> </table>		Left end	2 <sup>nd</sup> col	3 <sup>rd</sup> col	-	Right end	Top	00H	01H	02H	-	13H	Bottom	14H	15H	16H	-	27H																																																																							
	Left end	2 <sup>nd</sup> col	3 <sup>rd</sup> col	-	Right end																																																																																						
Top	00H	01H	02H	-	13H																																																																																						
Bottom	14H	15H	16H	-	27H																																																																																						
Luminance 6us (1BH) 4us (4CH) 4us (luminance)	1BH + 4CH + luminance	<p>The display luminance can be set to one of 4 levels.</p> <p>luminance = 00H – 3FH specifies 25%</p> <p>luminance = 40H – 7FH specifies 50%</p> <p>luminance = 80H – BFH specifies 75%</p> <p>luminance = C0H – FFH specifies 100% (default)</p>																																																																																									
Flickerless Writing Mode 6us (1BH) 6us (53H)	1BH + 53H	Set flickerless write mode. By default, priority is given to data communication and display flicker can occur if data is sent to the display continuously. If flickerless writing mode is specified, priority is given to display refresh to avoid possible flicker. Command and data busy times will be up to 200us longer when this mode is set.																																																																																									
Blink Speed Control 6us (1BH) 4us (54H) 6us (speed)	1BH + 54H + speed	The blink rate of the cursor can be specified. Rate = speed x 30ms. (default=14H)																																																																																									
Initialise 6us (1BH) 65us (49H)	1BH + 49H	Clear the display, erase any defined characters, set the cursor position to the top left of the display and reset all settings to defaults.																																																																																									
Character Write 7us (20us on scroll)	20H – FFH	Display the specified character from the currently selected font (or UDF is defined) at the current cursor position. After the character is written to the display a horizontal tab automatically follows.																																																																																									